



Simple × Easy *Select-Roller / A-Bar*


For color mixing of gravure,
For confirmation of film thickness, . . .

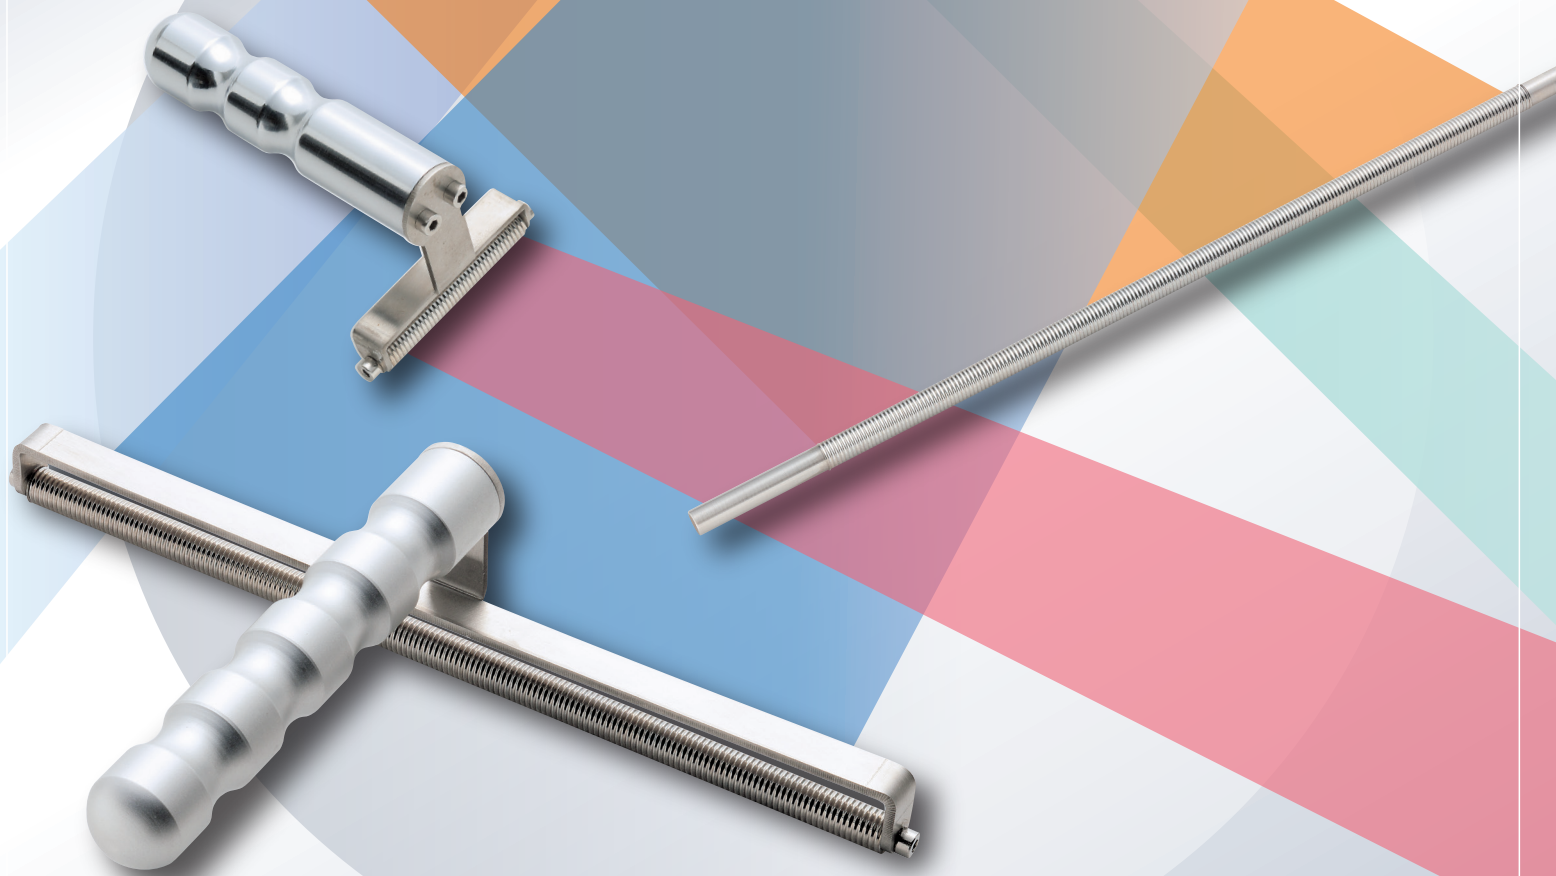

Wireless-Bar No wire winding up, free from wire cut or wire displacement. Extending the service life

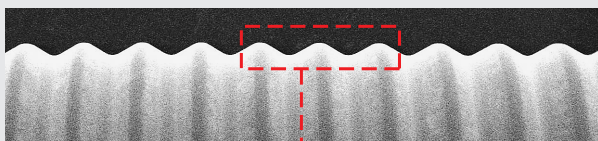


Zoom

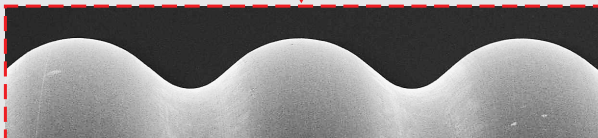


Specialty (Compared with Wire-Bar)

- Integral structure makes it free from wire cut.
- Integral structure makes it free from displacement
- Smooth surface curve, not easy to be clogged
- Good cleaning effect



《Wire-Bar》

- The wire is easy to be cut due to wire winding
- Wire displacement may occur due to wire winding method.
- Easy to be clogged due to small gap between wires
- Poor cleaning effect



Select-Roller / A-Bar

Special specifications suitable for thick film wet coating and high viscosity coating

Point 1 Maximum wet film thickness is 2.2 times that of conventional products

7 Specifications added

OSP-330T
330 μ m/wet (MAX)

※Please refer to the table on the lower right for specifications.

Point 2 Reduces streaking in high-viscosity, thick film wet coating

Coating Direction



OSP-80

Coating Direction



OSP-80T

※Not suitable for all coating fluids.

※Uses Select-Roller Takumi

※Uses water-based multi-color paint

◎Select-Roller L250

- Handle Material : Aluminum
- Jig,screw : Stainless steel





◎Select-Roller L60

- Handle Material : Stainless steel+hard chrome plating
- Jig,screw : Stainless steel



◎A-Bar

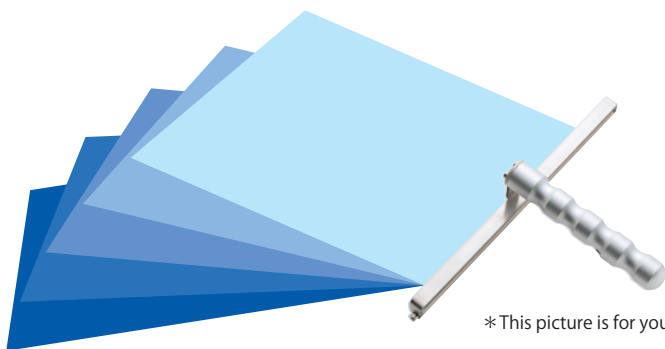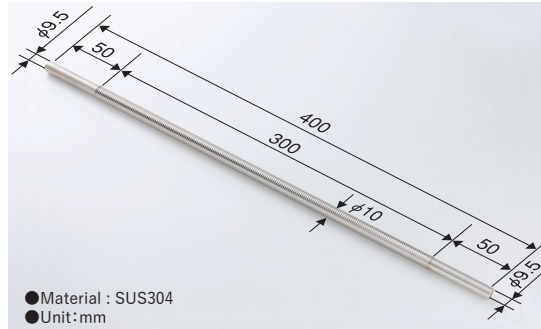

* This picture is for your reference only

Coating-Test-Kit

We could provide a Coating-test-kit for L250 & L60.

Please choose 10 pieces of bar of different specifications,we will provide you with a complete set of Coating-Test-Kit.

For enquiry and technical inquiries,please contact the following Address:

◎Coating-Test-Kit L250

Outer dimensions : 456 * 384 * 110



◎Coating-Test-Kit L60

Outer dimensions : 307 * 260 * 74



Set : ●Select-Roller (a Special packing box) : 10pcs ●Handle : 1pc ●Jig : 1pc ●Screw : 6pcs (2pcs spare)
●Wrench : 1pc ●Stainless steel cleaning plate : 1pc

Agend

Specification Select-Roller L250,L60/A-Bar(Common)

| film thickness μ m/wet(Max) | Wire Bar models (correspond) | Standard specifications | Special specifications |
|------------------------------------|---------------------------------|----------------------------|---------------------------|
| — | #0 | OSP-00 | — |
| 1.5 | #0.7 | OSP-1.5 | — |
| 2 | #1 | OSP-02 | — |
| 3 | #2 | OSP-03 | — |
| 4 | #2.7 | OSP-04 | — |
| 5 | #3 | OSP-05 | — |
| 6 | #3.4 | OSP-06 | — |
| 7 | #3.8 | OSP-07 | — |
| 8 | #4 | OSP-08 | — |
| 9 | #4.8 | OSP-09 | — |
| 10 | #5 | OSP-10 | — |
| 12 | #5.5 | OSP-12 | — |
| 13 | #6 | OSP-13 | — |
| 15 | #6.6 | OSP-15 | — |
| 17 | #7 | OSP-17 | — |
| 18 | #8 | OSP-18 | — |
| 22 | #9 | OSP-22 | — |
| 25 | #10 | OSP-25 | — |
| 30 | #12 | OSP-30 | — |
| 35 | #14 | OSP-35 | — |
| 42 | #16 | OSP-42 | — |
| 47 | #18 | OSP-47 | — |
| 52 | #20 | OSP-52 | — |
| 80 | #30 | OSP-80 | OSP-80T |
| 100 | #37 | OSP-100 | OSP-100T |
| 120 | #46 | OSP-120 | OSP-120T |
| 150 | #55 | OSP-150 | OSP-150T |
| 180 | #68 | — | OSP-180T |
| 200 | #75 | — | OSP-200T |
| 230 | #84 | — | OSP-230T |
| 250 | #90 | — | OSP-250T |
| 270 | #99 | — | OSP-270T |
| 300 | #108 | — | OSP-300T |
| 330 | #119 | — | OSP-330T |

* The above mentioned maximum wet film thickness is the theorethical value with 100% transfer rate
Attention:The actual coating thickness varies with coating machine,base material and coating liquid etc.



OSG SYSTEM PRODUCTS CO.,LTD.

8-24, Tedori, Kaminagayama-cho, Toyokawa
City, Aichi Pref. 441-1202, Japan

Phone:0533-92-1511 Fax:0533-92-1512

E-mail:osp-info@osg.co.jp

Homepage <http://www.j-osp.com/>