

EEP LUCE type





- Free from wire cut or wire displacement.
 Less likely to clog and cleans up easier.
 Excellent coating liquid leveling property.

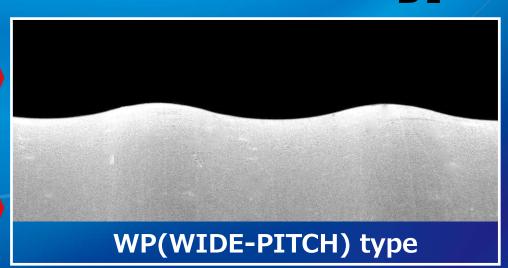

[WP type features]

- Improved cleanability compared to S type.
 Improved leveling compared to S type.
 Scratch reduction.

WP type lineup

WB	Pocket area per 1mm (㎜)	S形	Pocket area per 1mm (📶)	WP形	Pocket area per 1mm (៣៣)
#1	0.0027	P0.08H5S	0.0025	WP0.2H6S	0.0028
#2	0.0055	P0.1H11S	0.0057	WP0.2H10S	0.0055
#3	0.0082	P0.1H17S	0.0080	WP0.2H15S	0.0081
#4	0.0109	P0.15H22S	0.0110	WP0.2H22S	0.0107
#5	0.0136	P0.2H24S	0.0130	WP0.4H27S	0.0136
#6	0.0164	P0.25H29S	0.0162	WP0.4H32S	0.0164
#7	0.0191	P0.25H37S	0.0188	WP0.5H33S	0.0187
#8	0.0218	P0.25H49S	0.0226	WP0.5H44S	0.0218
#9	0.0245	P0.25H50S	0.0246	WP0.5H49S	0.0245
#10	0.0273	P0.25H55S	0.0268	WP0.5H55S	0.0273
#11	0.0300	P0.3H60S	0.0300	WP0.6H59S	0.0297
#12	0.0327	P0.35H65S	0.0325	WP0.8H63S	0.0340
#14	0.0382	P0.4H79S	0.0398	WP0.8H68S	0.0381
#15	0.0409	P0.4H83S	0.0413	WP0.8H82S	0.0409
#18	0.0491	P0.45H98S	0.0489	WP1.0H85S	0.0483

- D-Bar groove specification table is created based on pocket area per 1mm (mm²).
- * The pocket area per 1mm (mm²) of our D-Bar is the measurement data of a test piece manufactured with a material diameter of φ10.
- * The pocket area per 1mm (mm²) is manufactured and selected based on wire bar pocket area.
- We also manufacture special products. Please contact us on request.

