

# Customized Bits

## No Minimum Order Quantity Requirement

---

Point type

Fitting

Total length







Hardness


Shank type

Treatment









Point type  
▼

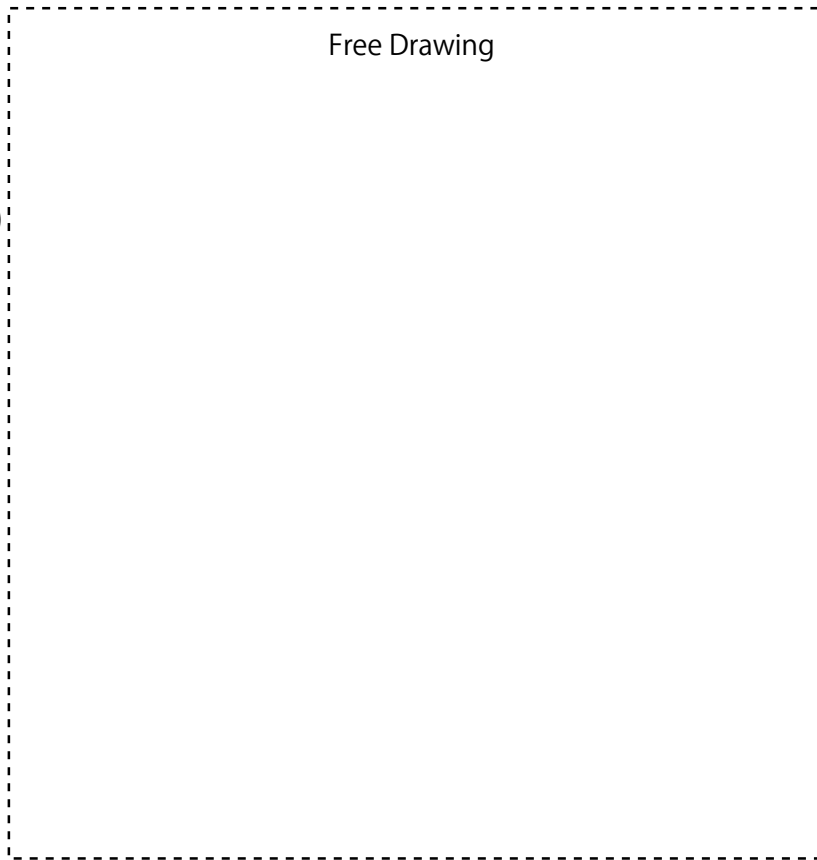
- Cross Recess(PH)  
 (     )
- Z type  
 Cross Recess (PZ)  
 (     )
- Hexagon  
 (     )
- Square  
 (     )
- Hexalobular  
 (     )
- Others  
 (     )



Total length

Shank type  
▼

- U6.3 (Groove 9 mm)
- V6.3 (Groove 13mm)
- C6.3 (Double Groove)  

- U5 (Groove 14mm)  

- H4
- H5  

- D4  

- N3  

- Double End  

- Other



Hardness	<input type="checkbox"/> HRC56	<input type="checkbox"/> HRC58 (standard)	<input type="checkbox"/> HRC60	<input type="checkbox"/> Request (HRC     )
Heat treatment	<input type="checkbox"/> Shot blast	<input type="checkbox"/> Black color	<input type="checkbox"/> Other Request (     )	
Fitting	<input type="checkbox"/> With		<input type="checkbox"/> Non	
Magnet	<input type="checkbox"/> With		<input type="checkbox"/> Non	
Quantity	pcs.			
Lead time	<input type="checkbox"/> Normally (30 days)		<input type="checkbox"/> Urgent (Request ETD     )	
Other Comment				

**【Contact Information】**

Company			
Address			
Full name			
Phone number		FAX	
E-mail			



**OSG SYSTEM PRODUCTS CO.,LTD.**

8-24 Tedori, Kaminagayama-cho, Toyokawa City,

Aichi Pref. 441-1202, Japan

E-mail: [osp-info@osg.co.jp](mailto:osp-info@osg.co.jp)